


Connect your serial Device.
Just what you need.



RS232/485/422 serial ports

The dual serial port extension card offers OEMs and system integrators the ability to interconnect and retrieve data from serial devices. As a transparent gateway, the Ewon Flexy is the link between any serial devices or PLCs and the Ethernet LAN. As a data acquisition gateway, the Ewon polls the serial devices at defined intervals to feed its internal memory tags with live and time-stamped data.

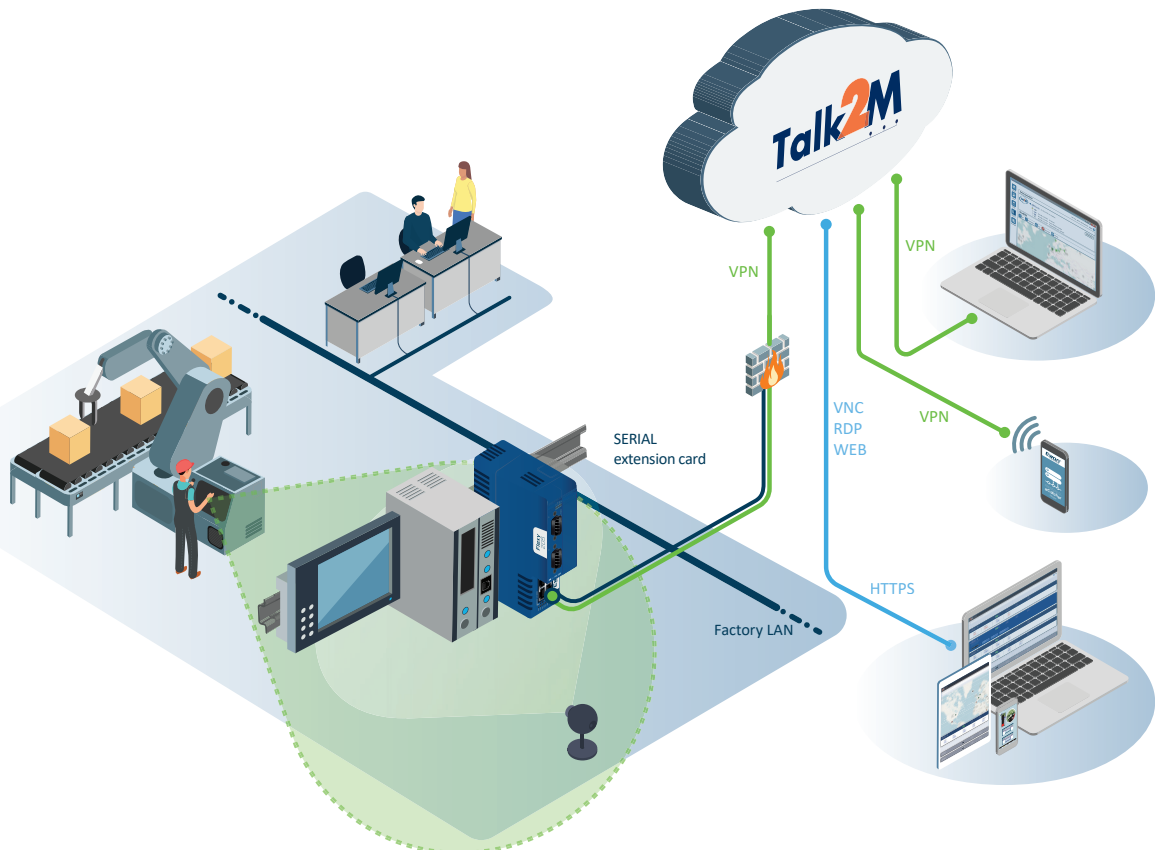


Technical characteristics:

		RS232/485/422 Port	RS232 Port
Number of ports		1	1
Physical mode		RS232/422/485, configurable by dip switch	RS232
Connector		SUBD9 (male)	
Operating temp.		-25 to +60°C	
Certifications			
CE	Compliant with	EMC Directive 2014/30/EU; LVD 2014/35/EU RoHS3 Directive 2015/863/EU REACH	
	According to standards	EMC emission Class A EN55032; EN55024 Safety: EN60950-1; EN 62368-1	
FCC/IC	Compliant with	This product complies with the Part 15 of the FCC rules	
Japan	Compliant with	This device complies with Japanese regulations	
Safety	Conform to	EN;UL;IEC;CAN 60950-1	
		EN;UL;IEC;CAN 62368-1 UL recognized: file number E350576 CB certificate n° DK-53957-A1-UL & DK-84039-UL	
Ordering Ref.			
FLA3301			

Discover more:

The Ewon Flexy is equipped with extensions cards allowing you to keep up with the evolution of communication technologies while protecting your investment in the device. Discover them all and build your perfect Flexy!

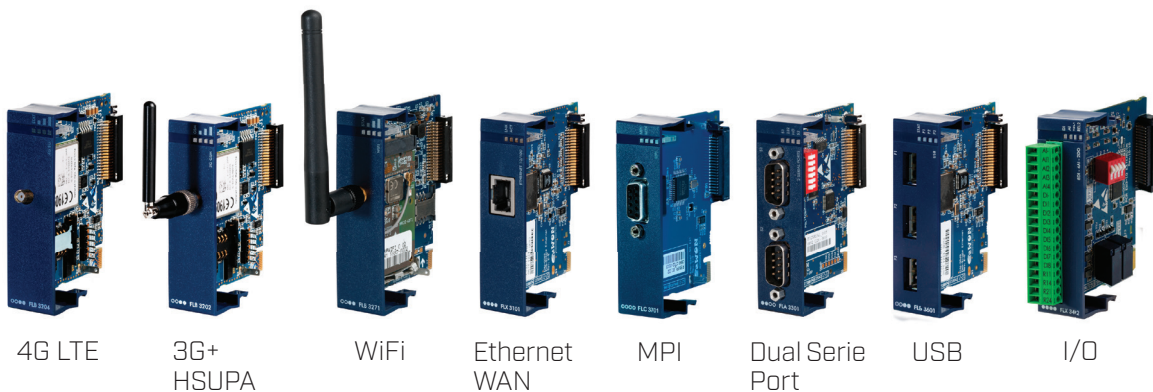

Learn more on www.ewon.biz

The Ewon Flexy is a multipurpose internet data gateway that allows Machine Builders to monitor and collect vital KPIs for analysis and predictive maintenance.

